


 DENOTES  
MEGALUG

- NOTES:**
1. MEGALUGS TO BE USED AT ALL MECHANICAL JOINTS.
  2. PLACE CONCRETE BLOCK UNDER ALL GATE VALVES AND HYDRANTS.
  3. THRUST BLOCKING AT ALL TEES, BENDS, AND HYDRANTS.
  4. ALL FITTINGS, NUTS, AND BOLTS SHALL BE BLUE CORE OR STAINLESS STEEL.
  5. BLOCKING SHALL BE AGAINST UNDISTURBED SOILS.

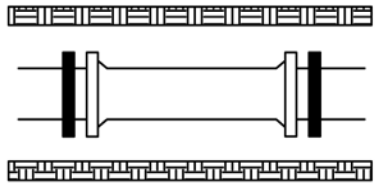

**CITY OF  
CHANHASSEN**

TYPICAL  
MEGALUG  
LOCATION

REVISED: 2-16

FILE NAME: G:\ENG\SPECS\1009

ENGINEERING DEPARTMENT

PLATE NO.: 1009