


HUB WITH THREADED METAL PLUG TO BE SET UNDER YARD BOX COVER PLUG TO BE MAGNETIZED TO ALLOW FOR LOCATES VIA METAL DETECTOR. TRACER WIRE TO BE BROUGHT UP INTO BOX WITH 4" ADDITIONAL SLACK OF WIRE.

12" X 12" YARD BOX WITH CLOSED COVER TO MATCH SURROUNDING COLORS AS APPROVED BY ENGINEER.

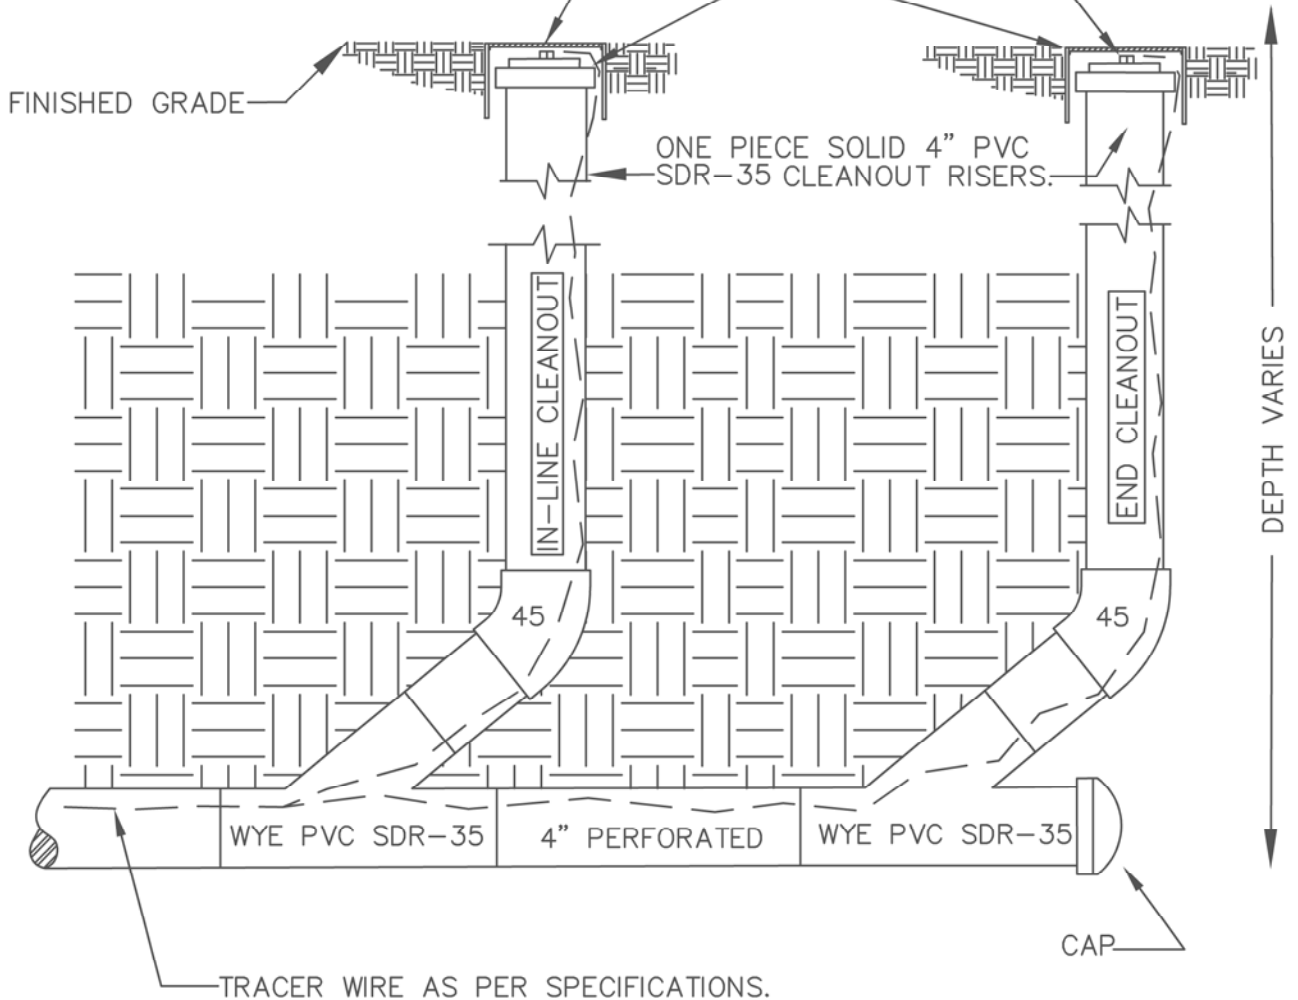

NOTE:

1. SOLVANT WELD ALL JOINTS ON CLEAN OUT. (NON-GASKETED)
2. CLEAN OUTS SHALL BE SPACED AT 200' INTERVALS (MAXIMUM)
3. BENDS AND RISER TO BE SAME SIZE AS DRAINTILE MAIN.
4. ALL DRAINTILE MUST HAVE TRACER WIRE BROUGHT UP TO THE SURFACE AT EACH STRUCTURE IN TRACER WIRE BOX PER DETAIL 5501 OR AT A CLEAN OUT AS SHOWN ABOVE. FOLLOWING COMPLETION, THE CONTRACTOR WILL BE REQUIRED TO LOCATE VIA TRACER WIRE TEST.



**CITY OF
CHANHASSEN**

SUB-SURFACE PVC DRAINTILE
CLEANOUTS FOR INLINE AND
END OF RUN CLEANOUTS

REVISED: 12-19

FILE NAME: G:\ENG\SPECS\5234

ENGINEERING DEPARTMENT

PLATE NO.:

5234