



ONE EXTRA BAR IN BOTTOM

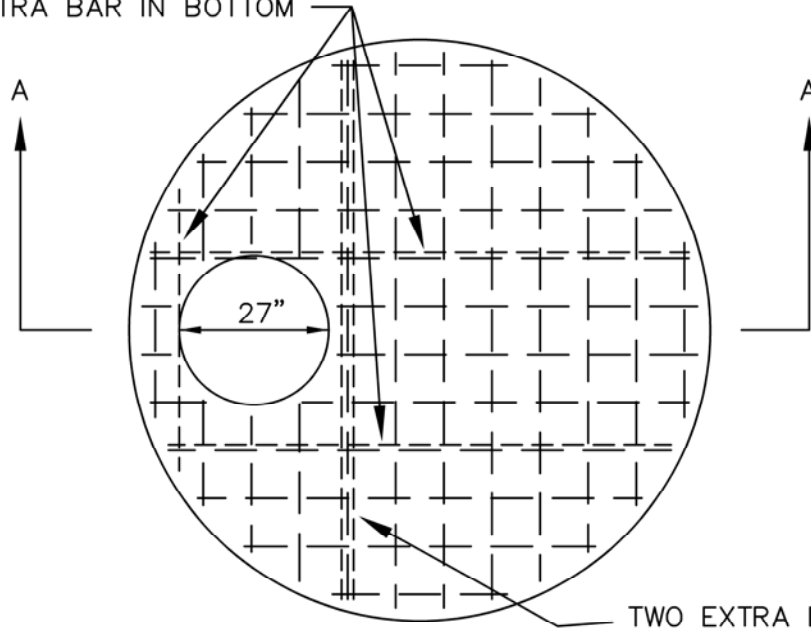

TWO EXTRA BAR IN BOTTOM

PLAN OF COVER

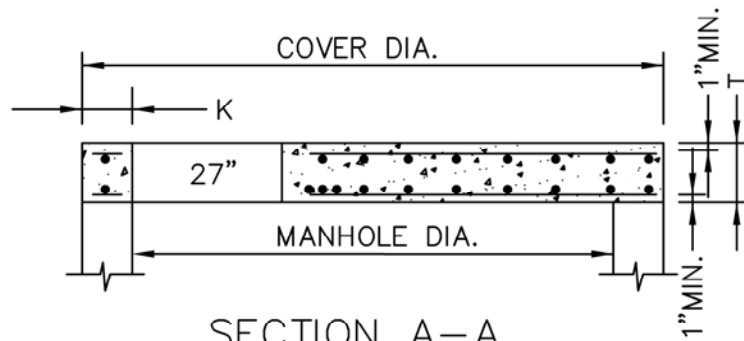

SECTION A-A

COVER REQUIREMENTS						
MANHOLE DIAMETER	COVER DIAMETER	WEIGHT OF SECTION	T	K	BOTTOM BARS	TOP BARS
48"	58"	1140 LBS.	6"	6"	NO. 5@ 6"	
54"	65"	2000 LBS.	8"	6"	NO. 5@ 6"	
60"	72"	2525 LBS.	8"	7"	NO. 5@ 4"	NO. 3@ 6"
66"	79"	3105 LBS.	8"	7"	NO. 5@ 4"	NO. 3@ 6"
72"	86"	3740 LBS.	8"	8"	NO. 5@ 4"	NO. 3@ 6"
78"	93"	4403 LBS.	8"	8"	NO. 5@ 4"	NO. 3@ 4"
84"	100"	5710 LBS.	8"	9"	NO. 5@ 4"	NO. 3@ 4"
90"	106"	5840 LBS.	8"	9"	NO. 5@ 4"	NO. 3@ 4"
96"	113"	6680 LBS.	8"	9"	NO. 5@ 4"	NO. 3@ 4"
102"	119"	7450 LBS.	8"	9"	NO. 5@ 4"	NO. 3@ 4"



**CITY OF
CHANHASSEN**

MANHOLE
TOP SLAB

REVISED: 1-10

FILE NAME: G:\ENG\SPECS\2108

ENGINEERING DEPARTMENT

PLATE NO.:

2108